

**FK** **FUKE** 福客®

**FUKE**

**Boutique Manufacturing  
Conquer The World With Quality**

**FK80-9**

进 取 不 止

[www.fukeonline.com](http://www.fukeonline.com) [fk002@fukebn.com](mailto:fk002@fukebn.com)

**FK80-9**

Total Weight: 7800 kg

Standard bucket capacity: 0.3 m<sup>3</sup>

Rated power: 44.4/2100 kW/rpm

- New generation products
- National Three Emissions
- Advanced hydraulic system
- Efficient leveling ability
- Durable metal cover
- Safe and comfortable cab
- Convenient maintenance

## ► Technical specifications

### Basic parameters

Total Weight	7800 kg
Standard bucket capacity	0.3 m <sup>3</sup>
Standard bucket width	845 mm

### Performance parameter

Engine	Yanmar
Engine rated power	44.4/2100 kW/rpm
Gradeability	35 °
Maximum digging force of stick	38 kN
Maximum digging force of bucket	56 kN
Driving speed	2.6/3.9 km/h
Main traction force	68 kN
Platform rotation speed	10-13 rpm

### Job parameters


Maximum digging height	7112 mm
Maximum digging depth	4022 mm
Maximum digging radius	6390 mm
Maximum ground excavation radius	6248 mm
Maximum unloading height	5055 mm
Minimum radius of gyration	1881 mm
Maximum vertical digging depth	3515 mm

### Transport size

Overall length (transport state)	6215 mm
Overall width (transport state)	2260 mm
Overall height (transport state)	2705 mm

### Other parameters

Track width	2150 mm
Track length	2783 mm
Track shoe width	450 mm
Minimum ground clearance	380 mm
Balance weight off the ground	790 mm
Radius of tail gyration	1881 mm
Track wheelbase	2200 mm
Fuel tank capacity	151 L
Hydraulic oil tank capacity	125 L

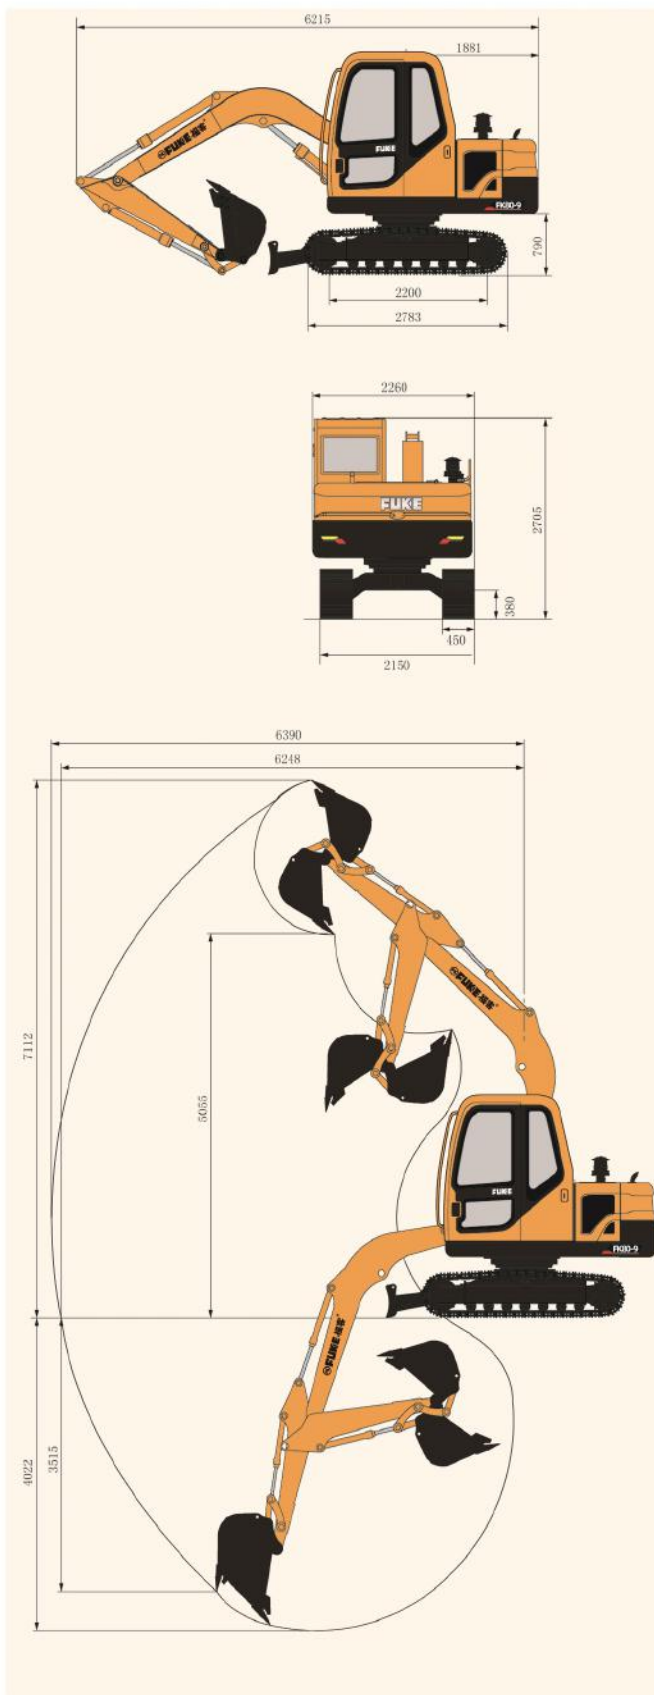

**安徽福客重工设备有限公司**  
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

[www.fukeonline.com](http://www.fukeonline.com)

